

Access door

EPFH



Description

Access door, which fits outside a Safe fitting.


Some dimensions Ø80–355 have notches for bayonet locking, in order to be better fixed in ducts with positive pressure. You must then add two rivets to the fitting.

Dimensions Ø400–630 have eccentric locks in order to be better fixed in ducts with positive pressure. You must then mount the hooks of the locks in the fitting.

No Click function – no notches.

Can achieve maximum tightness class D.

Dimensions

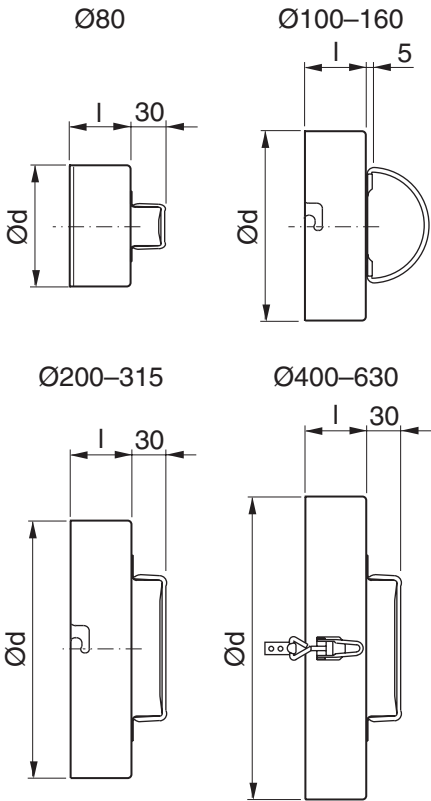

Ød nom	l mm	m kg	Handle	Lock
80	48	0,09	1 fixed small	–
100	40	0,15	1 folding	bayonet
112	40	0,16	1 folding	–
125	40	0,17	1 folding	bayonet
140	40	0,19	1 folding	–
150	40	0,21	1 folding	–
160	40	0,22	1 folding	bayonet
180	40	0,24	1 fixed	–
200	40	0,32	1 fixed	bayonet
224	60	0,38	1 fixed	–
250	60	0,55	2 fixed	bayonet
280	60	0,64	2 fixed	–
300	60	0,69	2 fixed	–
315	60	0,74	2 fixed	bayonet
355	60	0,87	2 fixed	–
400	80	1,26	2 fixed	eccenter
450	80	1,57	2 fixed	eccenter
500	80	1,87	2 fixed	eccenter
560	80	2,18	2 fixed	eccenter
600	80	2,49	2 fixed	eccenter
630	80	2,71	2 fixed	eccenter

Ordering example

Product EPFH 250
Dimension Ød